


Model:
T-CBD15W-Lix

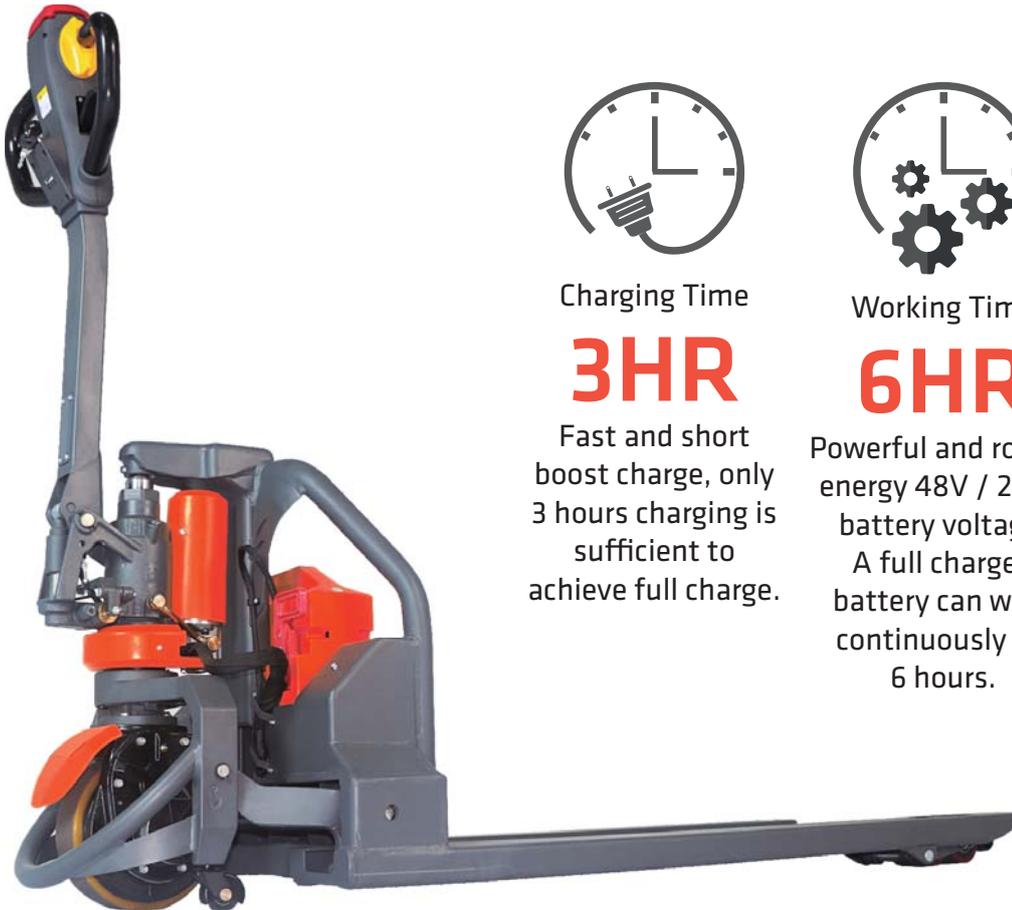

Charging Time

3HR

Fast and short boost charge, only 3 hours charging is sufficient to achieve full charge.



Working Time

6HR

Powerful and robust energy 48V / 20Ah battery voltage. A full charged battery can work continuously for 6 hours.



Work Shift

24HR

Prepare just two pieces of lithium batteries. One charging, one working, 24 hours without break.

- **Multi-function control handle**

Incorporates butterfly-style thumb controls, emergency reverse button, horn button and key switch for ease of use.

- **Ergonomic spring-loaded**

Steering handle with comfort grip for reduced operator fatigue.

- **Plug-in battery design**

Makes it easier to remove and change, no need additional tools or devices.

- **With EM brake offers regenerative braking**

- **Compact vehicle design**

Rugged and high-performing yet lightweight body provides exceptional maneuverability in tight areas.

- **Integrated rocker arm**


The rocker arm is casted in single piece, intensifying the strength and structure.

- **Less wiring, easy service**

Mechanical and electronic components are easy to change and service.

- **Brushless motor**



Equipped with horizontal type brushless driving motor and gear box, offers high drive speed and low torque output. Wheel can be independently dismantled.

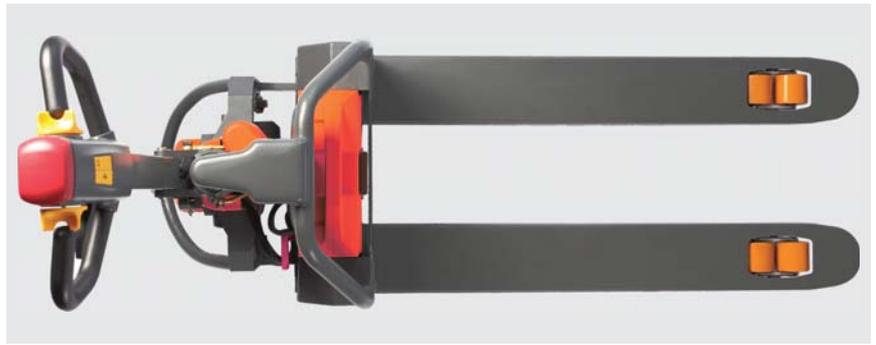

1 kg = 2.205 lb 1 inch = 25.4 mm

Model	T-CBD15W-Lix	
Load capacity	Q (lbs)	3300
Load centre distance	C (inch)	23.6
Fork height (lowered)	h13 (inch)	3.15
Type size (front)	inch	Ø9.8
Type size (rear)	inch	Ø3.15
Wheels, number front rear (x = driven wheels)		1x2(4)
Max. lift height	h3 (inch)	4.3
Height of tiller in drive position min./max.	h14 (inch)	25 / 47.2
Overall length	L1 (inch)	63.9 / 66.7
Length to face of forks	L2 (inch)	18.6
Overall width	b1 (inch)	21.6 / 27
Fork dimensions (S x E x L)	inch	1.8 x 6.3 x 45.3 (48)
Width overall forks	b5 (inch)	21.6 / 27
Aisle width for pallets 39.4"x47.2" crossways	Ast (inch)	87.6 / 90.3
Aisle width for pallets 31.5"x47.2" lengthways	Ast (inch)	82.5 / 83.9
Turning radius	Wa (inch)	56 / 58.8
Travel speed (laden / unladen)	mph	2.5 / 2.8
Max. gradeability (laden / unladen)	%	4 / 20
Battery voltage, nominal capacity K5	V / Ah	48 / 20
Battery weight	lbs	18.7
Battery dimensions (L x W x H)	inch	13.4 x 5.1 x 12.1
Service weight (with battery)	lbs	320

Remarks : T-CBD15W-Lix with horizontal drive motor & brake.

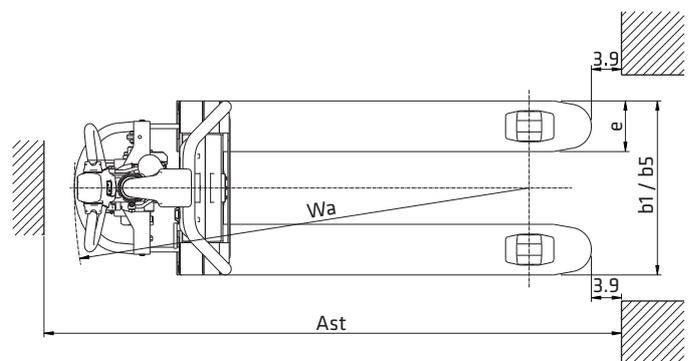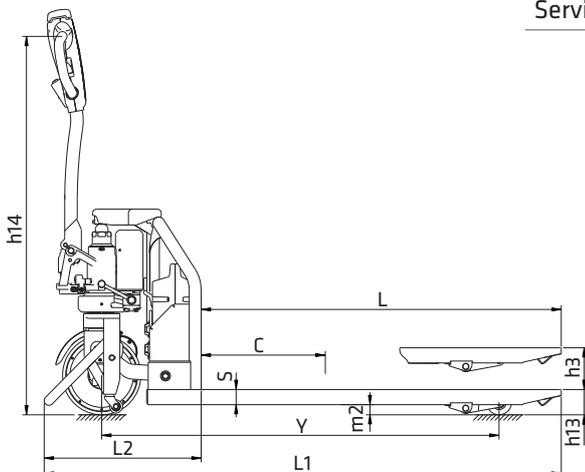

TAILIFT MATERIAL HANDLING TAIWAN CO., LTD.

No. 5, Zili 1st Road, Nankang Industrial Zone, Nantou city 540, TAIWAN

Tel: +886-49-2263800 Fax: +886-49- 2252919

Website: www.tailift.com E-mail: insales@tailift.com.tw

TAILIFT MATERIAL HANDLING USA, Inc.

5550 Jurupa St, Ontario, CA 91761

TEL: (909) 930-9801, (909) 930-9802 FAX: (909) 930-9739

Website: www.tailift-usa.com

